

Discontinuation Notice of Head Unit Model ZUV-H[]MB series.**Product Discontinuation**

Head Unit of UV-light Curing Systems

**Model ZUV-H[]MB****Recommended Replacement**

Head Unit of UV-light Curing Systems

Model ZUV-H[]MC**[Discontinuation date]**

The end of March, 2015

[Caution on recommended replacement]

- UV-Light intensity 140% rise. (Requirement of output control by a case.)
- Full compatible. (It is stable.)

[Difference from discontinued product]

Recommended replacement Model	Body Color	Dimen-sions	Wire connection	Mounting Dimensions	Charact-eristics	Operation ratings	Operation methods
ZUV-H[]MC	**	**	-	**	**	-	-

** : Compatible

* : The change is a little/Almost compatible

-- : Not compatible

- : No corresponding specification

[Product Discontinuation and recommended replacement]

Product discontinuation	Recommended replacement
ZUV-H10MB	ZUV-H10MC 0.3M
ZUV-H10MB 2M	ZUV-H10MC 2M
ZUV-H20MB	ZUV-H20MC 2M
ZUV-H30MB	ZUV-H30MC 0.3M
ZUV-H25MB	ZUV-H25MC 2M
ZUV-H35MB	ZUV-H35MC 0.3M

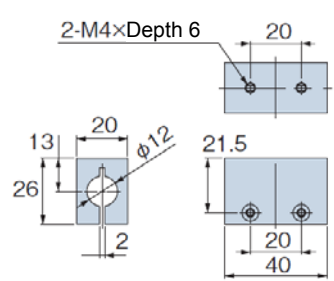
[Body color]

Product discontinuation Model ZUV-H[]MB	Recommendable replacement Model ZUV-H[]MC
Black	Black

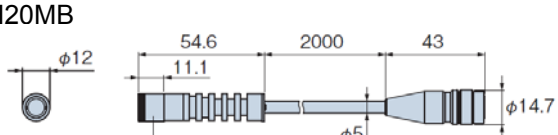
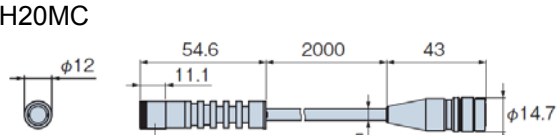
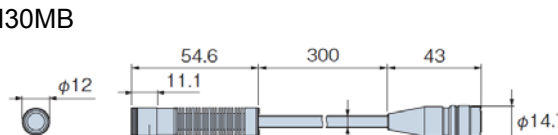
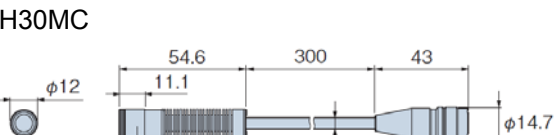




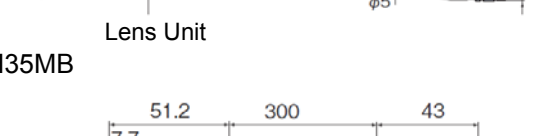
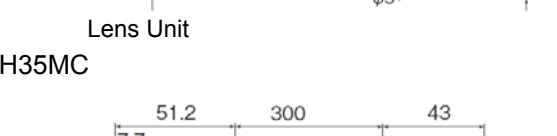
[Wire connection]

Product discontinuation Model ZUV-H□MB	Recommendable replacement Model ZUV-H□MC
No corresponding specification	No corresponding specification

[Mounting dimensions]

Product discontinuation Model ZUV-H□MB	Recommendable replacement Model ZUV-H□MC
<p>Fixture</p> 	<p>Fixture No difference.</p>

[Dimensions]

Product discontinuation Model ZUV-H□MB	Recommendable replacement Model ZUV-H□MC
All body styles No difference.	
<p>ZUV-H20MB</p>  <p>Lens Unit</p>	<p>ZUV-H20MC</p>  <p>Lens Unit</p>
<p>ZUV-H30MB</p>  <p>Lens Unit</p>	<p>ZUV-H30MC</p>  <p>Lens Unit</p>
<p>ZUV-H10MB</p>  <p>Lens Unit</p>	<p>ZUV-H10MC</p>  <p>Lens Unit</p>
<p>ZUV-H25MB</p>  <p>Lens Unit</p>	<p>ZUV-H25MC</p>  <p>Lens Unit</p>
<p>ZUV-H35MB</p>  <p>Lens Unit</p>	<p>ZUV-H35MC</p>  <p>Lens Unit</p>

[Characteristics]

Item		Product discontinuation Model ZUV-H□MB	Recommendable replacement Model ZUV-H□MC
Light source	Wave length	365 nm	No difference
	Class	Class 3B (JIS C 6802 2005), Class 3B (EN60825-1: 1994 +A1: 2002 +A2: 2001)	No difference
Vibration resistance		10 to 150 Hz, Acceleration: 50 m/s ² , Single amplitude: 0.35 mm, X, Y and Z directions, 10 sweeps each (8 min/sweep).	No difference
Shook resistance		150m/s ² , 6directions (+/-X, +/-Y, and +/-Z directions), 3 times each.	No difference
Ambient temperature		Operating: 5 to 35°C, Storage: -10°C to 60°C (with no condensation or icing)	No difference
Ambient humidity		Operating/storage: 30% to 85% (with no condensation or icing)	No difference
Degree of protection		IEC 60529 IP40	No difference
Materials		ZUV-H20MB / H25MB : Aluminum, Glass, Zinc ZUV-H10MB / H30MB / H35MB : Aluminum, Glass, Zinc, Copper	ZUV-H20MC / H25MC : No difference ZUV-H10MC / H30MC / H35MC : No difference

[Operation ratings]

Product discontinuation Model ZUV-H□MB	Recommendable replacement Model ZUV-H□MC
No corresponding specification	No corresponding specification

[Operation methods]

Product discontinuation Model ZUV-H□MB	Recommendable replacement Model ZUV-H□MC
No corresponding specification	No corresponding specification

Specifications and prices in this product news are as of the issue date and are subject to change without notice.
Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.